

BS 7121-2-7:2012



BSI Standards Publication

Code of practice for the safe use of cranes

Part 2-7: Inspection, maintenance and thorough examination – Overhead travelling cranes, including portal and semi-portal cranes, hoists, and their supporting structures

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide™



Publishing and copyright information

The BSI copyright notice displayed in this document indicates when the document was last issued.

© The British Standards Institution 2012

Published by BSI Standards Limited 2012

ISBN 978 0 580 78197 0

ICS 53.020.20

The following BSI references relate to the work on this standard:

Committee reference MHE/3/11

Draft for comment 12/30259758 DC

Publication history

First published November 2012

Amendments issued since publication

Date	Text affected
-------------	----------------------

Contents

Foreword *ii*

- 1 Scope 1
- 2 Normative references 1
- 3 Terms and definitions 1
- 4 General 1
- 5 Personnel carrying out pre-use checks, in-service inspections, maintenance and thorough examinations 1
- 6 Pre-use checks and in-service inspections 2
- 7 Maintenance of cranes and supporting structures 4
- 8 Thorough examination of cranes and supporting structures 5
- 9 Overload testing of cranes and supporting structures 9
- 10 Assessment of wire rope condition and discard criteria 12

Annexes

Annex A (informative) Examples of checklists for pre-use checking and in-service inspections of cranes 13

Bibliography 15

List of figures

Figure 1 – End carriage offset 11

Summary of pages

This document comprises a front cover, an inside front cover, pages i to iv, pages 1 to 16, an inside back cover and a back cover.

Foreword

Publishing information

This sub-part of BS 7121-2 is published by BSI Standards Limited, under license from the British Standards Institution and came into effect on 30 November 2012. It was prepared by Subcommittee MHE/3/11, *Crane safety and testing*, under the authority of Technical Committee MHE/3, *Cranes and derricks*. A list of organizations represented on these committees can be obtained on request to their secretary.

Supersession

Together with BS 7121-2-1, BS 7121-2-3, BS 7121-2-4 and BS 7121-2-5, this sub-part of BS 7121-2 supersedes BS 7121-2:2003, which will be withdrawn when all these sub-parts have been published.

Relationship with other publications

The BS 7121 series is being revised. The following new sub-parts of BS 7121-2 have been published or are in preparation.

- Part 2-1: *Inspection, maintenance and thorough examination – General*;
- Part 2-3: *Inspection, maintenance and thorough examination – Mobile cranes*;
- Part 2-4: *Inspection, maintenance and thorough examination – Loader cranes*;
- Part 2-5: *Inspection, maintenance and thorough examination – Tower cranes*;
- Part 2-7: *Inspection, maintenance and thorough examination – Overhead travelling cranes, including portal and semi-portal cranes, hoists, and their supporting structures*;
- Part 2-9: *Inspection, maintenance and thorough examination – Cargo handling and container cranes*.

When all sub-parts of BS 7121-2 have been published, it is intended that CP 3010 will be withdrawn and BS 5744 will be revised to cover manually operated and light cranes only.

This sub-part of BS 7121-2 is intended to be read in conjunction BS 7121-2-1.

Information about this document

The Health and Safety Executive (HSE) commends the use of this British Standard to those who have duties under the Health and Safety at Work etc. Act 1974 [1]. This standard was drawn up with the participation of HSE representatives and it will be referred to in the relevant HSE publications.

The BS 7121-2 series has been accepted by the HSE as representing the consensus of opinion based on practical experience for safety of cranes.

Hazard warnings

WARNING. This British Standard calls for the use of procedures that can be injurious to health if adequate precautions are not taken. It refers only to technical suitability and does not absolve the user from legal obligations relating to health and safety at any stage.

Use of this document

As a code of practice, this sub-part of BS 7121-2 takes the form of guidance and recommendations. It should not be quoted as if it were a specification and particular care should be taken to ensure that claims of compliance are not misleading.

Any user claiming compliance with this sub-part of BS 7121-2 is expected to be able to justify any course of action that deviates from its recommendations.

It has been assumed in the preparation of this British Standard that the execution of its provisions will be entrusted to appropriately qualified and experienced people, for whose use it has been produced.

Presentational conventions

The provisions of this standard are presented in roman (i.e. upright) type. Its recommendations are expressed in sentences in which the principal auxiliary verb is "should".

Commentary, explanation and general informative material is presented in smaller italic type, and does not constitute a normative element.

Contractual and legal considerations

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

Particular attention is drawn to the following specific regulations:

- Health and Safety at Work etc. Act 1974 [1];
- Lifting Operations and Lifting Equipment Regulations (LOLER) 1998 [2];
- Provision and Use of Work Equipment Regulations (PUWER) 1998 [3];
- Supply of Machinery (Safety) Regulations 2008 (as amended) [4].

NOTE Details of the Lifting Operations and Lifting Equipment Regulations 1998 [2] and the Provision and Use of Work Equipment Regulations 1998 [3], together with an HSE Approved Code of Practice and HSE Guidance, are given in HSE publications Safe use of lifting equipment [5] and Safe use of work equipment [6].

1 Scope

This sub-part of BS 7121-2 gives recommendations for the pre-use checks, in-service inspection, maintenance, thorough examination (following installation, in service and following exceptional circumstances) and supplementary testing of overhead travelling cranes, including portal and semi-portal cranes, hoists, and their supporting structures.

For the purposes of this standard overhead travelling cranes, including portal and semi-portal cranes, and hoists are all included under the term "cranes".

This sub-part of BS 7121-2 is not applicable to permanently installed cranes on marine and other water-borne vessels.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

BS 7121-2-1:2012, *Code of practice for the safe use of cranes – Part 2-1: Inspection, maintenance and thorough examination – General*

BS ISO 4309:2010, *Cranes – Wire ropes – Care and maintenance, inspection and discard*

3 Terms and definitions

For the purposes of this sub-part of BS 7121-2, the terms and definitions given in BS 7121-2-1:2012 apply.

4 General

Regular pre-use checking, in-service inspection, maintenance and thorough examination of cranes are essential if cranes are to function safely and reliably. The nature of these activities can be summarized as follows.

- Pre-use checks are visual checks which are carried out to ensure that the crane has not suffered any damage or failure, and is safe to use.
- In-service inspections and maintenance are carried out to ensure that components are repaired or replaced before they deteriorate to a point at which they would become unsafe.
- Thorough examinations are carried out at specified intervals, after installation on a new site, after major alteration or repair or after the occurrence of exceptional circumstances which could jeopardize the safety of the crane.
- Supplementary testing is carried out in support of thorough examination and the extent and nature of any testing are specified by the competent person carrying out the thorough examination.

5 Personnel carrying out pre-use checks, in-service inspections, maintenance and thorough examinations

Attributes, competencies, competency assessment, training plans and training records of personnel should be in accordance with BS 7121-2-1:2012, Clause 5.

6 Pre-use checks and in-service inspections

6.1 General

Pre-use checks and in-service inspection of cranes, together with a system to rectify any defects disclosed, are required by the Health and Safety at Work etc Act 1974 [1] Section 2(2)(a); and LOLER 1998 [2] Regulation 9(3)(b) to ensure that the crane is safe to use and that any deterioration is detected and rectified before the crane becomes unsafe.

Examples of checklists for pre-use checking and in-service inspections are given in Annex A.

Pre-use checks and in-service inspections should only be carried out by personnel who have been adequately trained and assessed as competent to carry out the required tasks (see Clause 5). LOLER 1998 [2] requires that results of all in-service inspections are recorded in writing. It is recommended that the results of all pre-use checks are also recorded in writing.

The crane user should ensure that sufficient time is allowed for pre-use checks to be carried out before the crane starts work. The user should also ensure that a safe system of work is in place to prevent the person who is carrying out the checks/inspections from being exposed to danger.

6.2 Pre-use checks

Pre-use checks should be carried out at the start of each shift during which the crane is to be used. These are to test the functionality of the crane and visually check for any obvious defects. It is essential that these are carried out from a position of safety.

Visual checks are normally be made from floor level unless a better permanent vantage point is available.

In the event that it does not pass the pre-use check, there should be a procedure to isolate and lock-off the crane to prevent further use until the problem has been resolved.

6.3 In-service inspection

A regular in-service inspection should be made to identify any defects which might not be detected by the pre-use checks. In-service inspections should be carried out at intervals which ensure that any deterioration is identified before there is a risk of failure of the crane or injury to persons. Further guidance is given in HSE document L113 [5].

It might be convenient to schedule the inspections concurrently with planned preventive maintenance (see 7.3).

Steel structures suffer from fatigue, a process which can create cracks that propagate over time. If left unattended, cracks can cause serious failure of the crane structure, so the in-service inspection regime should include measures to detect cracks before the safety of the crane is affected.

The period between inspections should be decided on the basis of the duty of the crane and the environmental conditions and might need to vary between 1 week and 6 months. The period should be kept under review and adjusted according to the results of the inspections.

In the event that it does not pass the inspection, there should be a procedure to isolate and lock-off the crane to prevent further use until the problem has been resolved.

6.4 Reporting of defects

LOLER 1998 [2] requires that defects be reported immediately they are identified. There should be provision for the personnel carrying out the pre-use checks or in-service inspection(s) to make written reports of defects or observations immediately they are identified.

6.5 Records of pre-use checks and in-service inspections

6.5.1 General

Written records of all pre-use checks and in-service inspections should be kept.

6.5.2 Pre-use checks

The record of a pre-use check should include at least the following information:

- identity of the crane;
- date of inspection;
- result of the check, i.e. whether or not the crane passed;
- name and signature of person carrying out the check.

This may be kept to a minimum by, for example, completing a single line of a pro-forma record card located near the crane.

6.5.3 In-service inspections

The record of an in-service inspection should include at least the following information:

- date of the inspection;
- name of person carrying out the inspection;
- description and unique identification number of the equipment inspected;
- nature and extent of the inspection;
- results of the inspection, including details of the condition of critical components which need to be monitored, for example a wire rope showing signs of wear.

The record should be related to the crane's historical records and made available to the competent person responsible for the thorough examination (see Clause 8).

6.6 Inspection of second-hand cranes

When purchasing second-hand cranes, their condition should be inspected and assessed; nothing should be taken for granted. Second-hand cranes might contain latent defects which might otherwise only become apparent when the crane is put into service. They might have suffered significant damage and have been inadequately repaired. Second-hand cranes might also have been imported into the European Community without being modified to meet EU requirements, so called "Grey imports".

The assessment of a second-hand crane should include a review of maintenance records and previous reports of thorough examination, together with consultation of the manufacturer to obtain details of any major repairs etc. The contents of any data logger should be downloaded and reviewed. The assessment might require the removal of access covers or stripdown of major assemblies to reveal parts that could not ordinarily be seen. Once the crane's condition has been fully assessed, any necessary repairs should be carried out and appropriate inspection and maintenance intervals established.

7 Maintenance of cranes and supporting structures

7.1 General

Under the Provision and Use of Work Equipment Regulations (PUWER) 1998 [3] employers are required to ensure that cranes are maintained in an efficient state, in efficient working order and in good repair. To ensure adequate maintenance an effective maintenance management system should be set up in accordance with BS 7121-2-1:2012, 7.1.

7.2 Access for maintenance

NOTE Attention is drawn to the Work at Height Regulations 2005 (as amended) [7].

To maintain and repair cranes and their supporting structures in a safe and efficient manner, employers and maintenance contractors should ensure that procedures are in place to enable the maintenance personnel to access all relevant parts as and when required. Where it is important to gain access within a limited time, e.g. to repair a breakdown, contingency plans should be put in place.

In drawing up plans, consideration should be given to the following. Some parts might be accessible by using permanent facilities such as access ladders to the gantry combined with gantry and cross-bridge walkways. However, such facilities do not always provide access to all parts, and maintenance personnel might need to use personal protective equipment (PPE) to protect against the risk of a fall. Use of PPE requires suitable anchor points and a recovery plan in the event that a fall occurs. See BS 8437 for details on the selection and use of PPE for personal fall protection.

Temporary access facilities, such as a mobile elevating work platform (MEWP) or scaffolding, might be required to reach some parts. Such temporary facilities usually stand on the ground or floor of a building and require a suitable surface, space for access, space to operate in and time to deploy. The personnel who deploy and use such facilities should be trained for the purpose, and the equipment used should be in a serviceable condition.

Whilst planned maintenance should be carried out at a convenient time and with the crane in a position of choice, consideration should be given to repair in the event of a breakdown with the crane positioned at any point along the gantry and the crab or hoist positioned at any point across the crane bridge. The possibility of a breakdown with a load in the air should also be considered.

Where maintenance or repair is contracted out, the employer and contractor should agree in advance who is responsible for providing any PPE and its use, or providing temporary access facilities.

7.3 Planned preventive maintenance

Planned preventive maintenance should be carried out in accordance with the manufacturer's instructions (see also BS 7121-2-1:2012, 7.2.2 and 7.2.3). It might be convenient to schedule in-service inspections (see 6.3) concurrently with the planned preventive maintenance.

8 Thorough examination of cranes and supporting structures

8.1 General

LOLER 1998 [2] Regulation 9 requires cranes and supporting structures to be examined in the following circumstances (see BS 7121-2-1:2012, 8.3.1):

- before being put into use for the first time, unless the crane is new and the owner has an EC Declaration of Conformity dated not more than 12 months prior to the crane being used for the first time, LOLER Regulation 9(1);
- where safety depends on the installation conditions:
 - after installation and before being put into service for the first time, LOLER Regulation 9(2)(a);
 - after assembly and before being put into service at a new site or in a new location, LOLER Regulation 9(2)(b);

NOTE 1 This does not apply to a portable gantry crane which is moved from one location to another to perform a lifting operation, is not fixed in position, and is operating within the scope of the current report of thorough examination.

- periodically whilst in service, at maximum intervals of 6 months for cranes that lift people and 12 months for cranes that lift goods only, LOLER Regulation 9(3)(a)(i) and (ii);

NOTE 2 These maximum intervals may be reduced to take into account environmental factors or the general age and condition of the crane etc., (see BS 7121-2-1:2012, 8.7).

- after exceptional circumstances have occurred, LOLER Regulation 9(3)(a)(iv).

8.2 Selection of competent person

It is essential that the competent person undertaking the thorough examination of a crane has not been involved in the maintenance of the crane.

8.3 Scope of thorough examination before the crane is put into use for the first time

The competent person who undertakes the thorough examination should decide the scope of the examination. The extent of the thorough examination should reflect the likelihood of failure and the actual risk which could arise from any such failure. It should also take into account when the crane was made and the likely deterioration since manufacture, which could increase risks in use. Records of tests and inspections carried out by the manufacturer should also be taken into account.

8.4 Scope of thorough examination following installation

The competent person who undertakes the thorough examination should decide the scope of the examination. LOLER 1998 [2] Regulation 9(2)(a) and (b) requires that this establishes that the crane has been installed correctly and is safe to use.

As a minimum, the examination should ensure the crane has been installed, checked and tested in accordance with the manufacturer's instructions.

The scope of the thorough examination should be proportional to the complexity of the installation and take into account the reports of previous thorough examinations, where applicable.

8.5 Scope of periodic thorough examination

8.5.1 General

The competent person carrying out a periodic thorough examination should work to a defined scope of thorough examination that has been drawn up specifically for the crane they are required to examine (see BS 7121-2-1:2012, 8.6).

The defined scope of thorough examination should be drawn up in advance of the examination by a competent person and should identify those parts of the crane that should be thoroughly examined, together with required supplementary reports and tests and the extent to which they should be witnessed, and details of any required non-destructive testing of the crane structure and mechanisms.

The competent person carrying out the thorough examination may add to the defined scope but is not permitted to reduce it.

It is essential that the defined scope of thorough examination includes any dedicated ancillary equipment. Particular attention should be paid to wire ropes (see Clause 10).

The competent person who prepared the defined scope of thorough examination should periodically review it to take account of changes in usage of equipment, findings of previous thorough examinations, supporting supplementary reports and tests, together with any information from maintenance activities, manufacturers or other sources. A copy of the defined scope of thorough examination should be kept in the machine history file.

The defined scope of thorough examination should, as a minimum, include operation of the crane through all the motions while listening for any sounds that might indicate defects and observing any other malfunctions, and inspection of the components listed in 8.5.2. These components should be assessed against the relevant criteria listed in 8.5.3, taking into account the path of the load through the crane's structure and mechanisms. It is essential that the scope is risk based and takes into account the consequences of failure of the crane. The examination should be undertaken in a systematic manner to ensure that all components and structures, including the supporting structures, are examined.

Those parts of the supporting structure which are solely for the support of the crane should be included in the defined scope of thorough examination.

Those parts of the supporting structure which are not solely for the support of the crane gantry or track are outside the scope of the thorough examination.

8.5.2 Components to be included

The following components should be included in the defined scope of thorough examination for a crane (as applicable):

NOTE This list is not exhaustive.

- end carriage structures;
- long travel drive, wheels, axles, bearings and brakes;
- bridge girders;
- crab structure;
- cross travel drive, wheels, axles, bearings and brakes;
- cross travel rails;

- hoist mechanism including motor, brake, couplings, gearbox, drum and bearings;
- wire rope(s), their terminations and anchorages, guides, sheaves/pins, bearings, bottom block and hook(s);
- electrical control panel and wiring;
- operator cab and seating;
- operator controls, whether cab, pendant or cable-less;
- limit switches;
- platforms and access ladders;
- supporting structures;
- gantry beams, rails and fixings;
- end stops and buffers;
- down shop conductor system.

8.5.3 Assessment criteria

The following assessment criteria should be included in the defined scope of thorough examination for a crane:

NOTE This list is not exhaustive.

- alignment – within manufacturer's tolerance;
- corrosion – affecting strength or functionality;
- cracks – affecting strength or functionality;
- damage – affecting strength or functionality;
- distortion – affecting strength or functionality;
- functionality – as intended by manufacturer;
- leaks – affecting strength, functionality and slips;
- lubrication – adequacy;
- markings – presence, accuracy and condition;
- mode of operation – as intended by manufacturer;
- rope fit – as specified by manufacturer;
- rope reeving – as specified by manufacturer;
- rope specification – as specified by manufacturer;
- rope condition (see Clause 10);
- obstructions – impeding safe access;
- security – attachment of components and sub-structures, fasteners, welds, etc.;
- seizure – full or partial seizure of rotating components;
- tidiness – general housekeeping;
- wear – affecting strength or functionality.

8.6 Periodic thorough examination interval

The statutory maximum intervals of 6 months and 12 months may be reduced to take into account environmental factors or the general age and condition of the crane, etc. The decision to reduce the interval between thorough examinations may be made by the competent person, the crane owner or the crane user.

Reasons for reduction of the interval between thorough examinations include the following:

- if the crane frequently works above or near people;
- if the crane might be used for lifting of persons in exceptional circumstances, including rescue, even if it is not initially planned;
- to take into account the intensity of use of the crane and the environment in which it is used;
- following a review by the competent person of the in-service lift plan (risk assessment, method statement and schedule of lifts) to ascertain the likely load spectrum and frequency of use of the crane.

8.7 Thorough examination after exceptional circumstances

LOLER 1998 [2] requires that if the crane is subjected to exceptional circumstances it has to be removed from service and subjected to a thorough examination to determine whether it is safe to be returned to service. Exceptional circumstances include an overload, collision, use for particularly arduous duties, failure of a structural component or being subjected to weather in excess of design parameters. The scope of the thorough examination should be proportional to the nature of the exceptional circumstances and the extent of any repairs, and should take into account the reports of previous thorough examinations, where applicable.

8.8 Preparation for thorough examination

The crane should be checked to determine whether it is clean enough not to conceal the structure or mechanisms to an extent that would prevent an effective examination. If necessary the crane should be cleaned as required.

The crane should be positioned in a suitable area to enable the thorough examination to be undertaken safely.

To enable thorough examination of cranes and their supporting structures in a safe and efficient manner it is essential that safe means of access are provided (see 7.2).

If the local lighting is not adequate for examination purposes it should be supplemented by portable lighting.

The identification and rated capacity marked on the crane should be checked against the records, for example the test certificate, declaration of conformity, the manufacturer's instructions for use and the report of the last thorough examination.

The competent person carrying out the thorough examination should determine if there is any history of defects or malfunctions, and whether any repairs, alterations or additions have been made. The last report of thorough examination and in-service inspection reports should be consulted.

The crane should be made safe by isolating and locking-off the power supply when necessary and reinstating it as appropriate.

Where it is not possible to ascertain the condition of hidden mechanism parts, for example ropes, chains, sheaves or terminations, dismantling prior to thorough examination should be carried out as required by the competent person.

Additional means of safe access should also be provided as required by the competent person, e.g. scaffolding, working platforms or mobile elevating work platforms.

NOTE Attention is drawn to the Work at Height Regulations 2005 (as amended) [7].

8.9 Rated capacity indicator/rated capacity limiter (RCI/RCL) calibration check and functional test

There are many different types of RCI/RCL fitted to cranes and some older cranes might not have an RCI or RCL at all.

Where it is reasonably practicable to carry out a calibration check and functional test of the RCI/RCL, this should be undertaken in accordance with BS 7121-2-1:2012, 10.15 as part of the periodic thorough examination (see 8.5). Where it is not reasonably practicable, the individual parts and components of the RCI/RCL system should be checked individually.

9 Overload testing of cranes and supporting structures

9.1 General

All cranes and supporting structures should be overload tested before first use. In some circumstances it might be necessary to treat them as separate entities, for example where a structure supports more than one crane.

The extent of the testing should be clearly stated in the test report.

Cranes and supporting structures should be overload tested after major repairs or modifications.

9.2 Overload testing of cranes

9.2.1 Thorough examination and functional testing

Before overload testing, the crane and the part of the supporting structure within the test area should be thoroughly examined to determine whether it is in a safe state and condition to be overload tested.

The crane should be functionally tested without a load applied to determine whether the controls, switches, contactors, relays and other devices operate correctly. The operation and correct adjustment of the brakes and limit switches should be checked and tests carried out to determine whether primary safety and emergency systems are operating correctly.

9.2.2 Test at rated capacity

After the functional tests, the crane should be tested with a load equivalent to the rated capacity. At the start of the test, the crane should be positioned over a supporting stanchion or column of the gantry or beneath the connection point of a suspended track, as appropriate, with the crab or hoist positioned adjacent to the end carriage. With the crane in this position, provision should be made for measuring the deflection of the crane main girders at the centre span.

The load should then be raised until each tooth of the train of gears has been subjected to the load, then the load should be lowered to 100 mm to 200 mm above the ground. The load should be held in this position for 10 min to check the brake. The load should then be raised from the suspended position by a further 200 mm to check the ability to re-hoist and then lowered to 100 mm to 200 mm above the ground. The crab should be traversed to mid-span and the deflection measured. The load should be lowered to the ground to relieve the structure and then raised to determine whether the deflection remains constant.

The load should be traversed to the opposite gantry, and the crane should be travelled along the track until each tooth of the train of gears of the long travel motion has been subjected to the load. The load should be traversed across the bridge to the opposite gantry and the crane should be returned to its original lift position.

The maximum deflection of the main bridge with the crab and load at the centre of the bridge should not exceed $1/750$ of the span.

9.2.3 Overload test

The load should then be increased by 25% to form an overload test load and the overload test load should be hoisted until each tooth of the train of gears has been subjected to the overload, then lowered to 100 mm to 200 mm above the ground and the procedures detailed in 9.2.2 repeated with the overload test load suspended from the crane.

During the overload test the crane should remain stable and structurally sound and the brakes on each motion should function effectively. The traverse and travel braking systems should also function effectively with the overload applied.

During the overload test the crane should be operated at speeds appropriate to the safe control of the load, for example the lowest speed possible for the crane.

9.2.4 Testing of cranes with two or more hoists

For cranes with two or more hoists, separate tests in accordance with 9.2.2 and 9.2.3 should be carried out for each hoist. Where the use of more than one hoist at a time is permitted, all tests including the measurement of deflection should be carried out with all these hoists loaded simultaneously.

9.2.5 Post test thorough examination of the crane

On completion of the tests, a further thorough examination of the crane should be carried out by the competent person (see BS 7121-2-1:2012, 8.12) and any overload protection devices should be reset and their correct operation checked.

9.3 Overload testing of supporting structures

9.3.1 Assessment and thorough examination

Cranes can be supported in a variety of different ways. This could include a free-standing structure, or a gantry or track supported by the structure of the building or an engineering structure.

Those parts of the supporting structure which are not solely for the support of the crane gantry or track should be assessed by a structural engineer before any overload test is carried out. Those parts of the supporting structure which are solely for the support of the crane should be subjected to an overload test.

Prior to the application of the test loads, the competent person should carry out a thorough examination of the structure to determine whether it is in a safe condition to be overload tested.

An unloaded crane should then be travelled the full length of the supporting structure to check the alignment.

NOTE BS ISO 12488-1 contains detailed information about the alignment of gantries.

9.3.2 Testing

9.3.2.1 General

Testing should be carried out using the combination of loadings, cranes and crane positions that imposes the maximum loadings on the structure under test. This includes cranes in an adjacent bay.


9.3.2.2 Test at rated capacity

Each crane involved should lift a load equivalent to its rated capacity 100 mm to 200 mm above the ground. The load lifted by each crane should be traversed to the end of the crane bridge nearest the side of the structure being tested. The cranes should be positioned along the span of the structure so as to provide the maximum deflection at the span centre. The deflection should be measured. The deflection measurement should be made on the longest span of the gantry. Where the gantry has more than one beam section, it should be made on the longest span of each section. Where the gantry beams are supported by a structure which is solely for the support of the crane, if there is any variation of design or construction of the structure, the test should be repeated for each variation.

For structures built in accordance with BS 449-2, the maximum deflection should not exceed 1/360 of the span. For structures built in accordance with BS 5950-1 or BS EN 1993-6, the maximum deflection should not exceed 1/600 of the span.

NOTE For a single crane where the end carriage wheel centres are less than half the span of the structure, the maximum stress will occur when the end carriage is offset, as shown in Figure 1. The maximum deflection will occur at the span centre, L/2. If it is possible for more than one crane to be on the same span of the structure, the position of maximum stress will depend upon the wheel loadings and wheel centres when the cranes are in their closest possible proximity.

Figure 1 End carriage offset

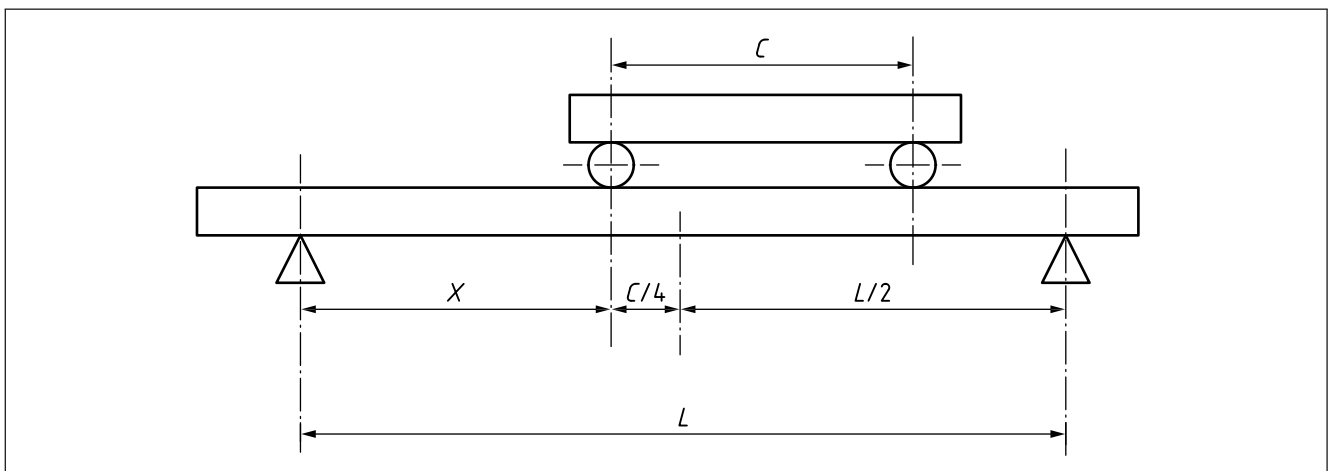

Bought by Mr Andrew Hemsworth, Lloyds British Group, on 30/11/2012 13:15 Latest version. For multi-user access www.bsigroup.com/license © BSI

9.3.2.3 Overload test

Each crane involved should then lift an overload which is 25% in excess of the load equivalent to the rated capacity of the crane 100 mm to 200 mm above the ground. The load lifted by each crane should be traversed to the end of the crane bridge nearest the side of the structure being tested. The cranes should be travelled the full length of the structure in such relative positions as to impose the maximum combined loading. The procedure should be repeated for the other side of the structure.

9.3.3 Post-test thorough examination of the supporting structure

On completion of the test, a further thorough examination of the supporting structure should be carried out by the competent person (see BS 7121-2-1:2012, 8.12).

10 Assessment of wire rope condition and discard criteria

When carrying out examination of wire ropes as part of the thorough examination of a crane, the competent person should examine the rope in accordance with BS ISO 4309:2010, Clause 5 and Clause 6 (see BS 7121-2-1:2012, Clause 14).

Annex A (informative) Examples of checklists for pre-use checking and in-service inspections of cranes

A.1 Pre-use checking

The following is an example of a checklist for pre-use checking:

NOTE 1 These checks are in addition to any checks needed in accordance with the crane manufacturer's instructions. This list is not exhaustive.

- a) check whether the report of thorough examination is current;
- b) check operation of emergency stop controls;
- c) check operation of all crane motion controls;
- d) check operation of electrical isolator switch;
- e) check operation of motion limiting devices, exercising caution whilst making checks in case of malfunction;

NOTE 2 When it is impractical, due to speed or distance, to check long travel limiting devices on every occasion, a check need only be made when the crane is to be used in their vicinity.

- f) check operation of brakes;
- g) check operation of audible warning devices, where fitted;
- h) check the general condition of the crane structure and mechanisms paying particular attention to the ropes, the sheaves and the hook and check for the occurrence of any unusual noises or erratic movement during operation;
- i) for cab-controlled cranes and cranes with access to the bridge, check that the work areas on the crane are tidy and free from any item which might fall, that access and egress from the cab is adequate and that the appropriate fire-fighting equipment is available;
- j) carry out a visual check on the condition of the cab controls, the pendant and associated cables or remote control station as appropriate; in particular, check the condition of the casings and seals of pendant and remote controls, as damage can lead to false commands;
- k) check that there are no obstructions in the path of travel of the crane or that adequate precautions are in place to prevent collisions; in particular, for goliath and semi-goliath cranes check for any debris or other track obstructions.

A.2 In-service inspections

The following is an example of a checklist for in-service inspections:

NOTE These checks are in addition to any checks needed in accordance with the crane manufacturer's instructions. This list is not exhaustive.

- a) carry out a visual inspection of all wire ropes for broken wires, flattening, basket distortion or other signs of damage, excessive wear and surface corrosion;
- b) carry out a visual inspection of all rope terminations, pins and retaining devices, and inspection of all sheaves, for damage, worn bushes or seizure;
- c) carry out a visual inspection of hooks, safety catches and other load lifting attachments for damage, free movement or wear and a visual inspection of the hook shank thread and securing nut for undue movement, which might indicate wear or corrosion;
- d) carry out a visual inspection of the structure for damage, for example cracked welds and loose bolts and other fasteners;

- e) check whether all moving parts are adequately lubricated with an appropriate lubricant;
- f) check whether all controls are clearly marked and operate correctly;
- g) operate the crane through all its motions while checking for any unusual noises or erratic movement during operation;
- h) check the operation of all motion limiting devices, anti-collision devices and emergency stops;
- i) carry out a visual inspection of any load limiter. This should at least comprise a physical check of the load limiter components, paying particular attention to cables, connectors and mountings;
- j) carry out a visual inspection of the electrical equipment and a check for exposure to contamination by oil, grease, water or dirt;
- k) check the functional effectiveness of the braking system and that it is suitable for the application. This might need to include seeking confirmation from the crane operator;
- l) carry out a visual inspection of rails and end stops;
- m) check for the presence of, and the condition of, all guards.

Bibliography

Standards publications

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

BS 449-2 (now withdrawn), *Specification for the use of structural steel in building – Part 2: Metric units*

BS 5950-1 (now withdrawn), *Structural use of steel in building – Part 1: Code of practice for design – Rolled and welded sections*

BS 8437, *Code of practice for selection, use and maintenance of personal fall protection systems and equipment for use in the workplace*

BS EN 1993-6, *Eurocode 3 – Design of steel structures – Part 6: Crane supporting structures*

BS ISO 12488-1, *Cranes – Tolerances for wheels and travel and traversing tracks – Part 1: General*

Other publications

- [1] GREAT BRITAIN. The Health and Safety at Work etc. Act 1974. London: The Stationery Office.
- [2] GREAT BRITAIN. The Lifting Operations and Lifting Equipment Regulations 1998. London: The Stationery Office.
- [3] GREAT BRITAIN. The Provision and Use of Work Equipment Regulations 1998. London: The Stationery Office.
- [4] GREAT BRITAIN. The Supply of Machinery (Safety) Regulations 2008 (as amended). London: The Stationery Office.
- [5] HEALTH AND SAFETY COMMISSION. *Safe use of lifting equipment. Lifting Operations and Lifting Equipment Regulations 1998. Approved code of practice and guidance (L113)*. Sudbury: HSE Books, 1998.
- [6] HEALTH AND SAFETY COMMISSION. *Safe use of work equipment. Provision and Use of Work Equipment Regulations 1998. Approved code of practice and guidance (L22)*. Sudbury: HSE Books, 2008.
- [7] GREAT BRITAIN. The Work at Height Regulations 2005 (as amended). London: The Stationery Office.

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services. It presents the UK view on standards in Europe and at the international level.

BSI is incorporated by Royal Charter. British Standards and other standardisation products are published by BSI Standards Limited.

Revisions

British Standards and PASs are periodically updated by amendment or revision. Users of British Standards and PASs should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using British Standards would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Similar for PASs, please notify BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers BSI Subscribing Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of British Standards and PASs.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, BSI will supply the British Standard implementation of the relevant international standard, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards and PASs via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about British Standards is available on the BSI website at www.bsi-group.com/standards

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that own copyright in the information used (such as the international standardisation bodies) has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Department.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards